


TEST PAGE

Make sure everything is the right scale and you can see the black border around this page on all sides.

The designs, instructions and patterns are only intended for personal use by sewing hobbyists. All industrial use is prohibited. The materials, including the photographs, drawings, instructions, articles and patterns, are protected by copyright laws and the right of reproducing them by any means or in any form is exclusively reserved for the copyright holder. The copying of the material onto a device that can be used for duplicating it is also regarded as reproduction. Copyright © Marina Karlova. All rights reserved.



You can sell the items you create using this pattern but I would kindly ask you to buy the pattern again for every 10 items you sell, this is a way for me to get my royalties.

Little Round Bag



Materials:

For body and bottom 3-4 oz medium to firm temper. Something heavier for strap. I used New Haven 3-4 oz and a chrome tan 6 oz for the strap.

Hardware:

1 x button stud

2 x swivel snaps or any other hooks you wanna use

Tools:

Scissors, knife (paper knife or rotary cutter would also work).

Stitching irons: my pattern is made for 5mm stitching irons (5 stitches per inch). If you are willing to use any other size please make sure that the hole count is the same where it has to be the same: the pocket seams, the vertical seams, the bottom and both front and back panels.

Needles - according to your thread size, a pair of harness needles.

Mallet, grommet setter, rivet setter, hole punch (3/8 for top holes and a small one for your button stud).

Instructions:

Print the pattern at actual size (100%). Use the reference on top of each page to make sure everything is printed correctly. Join the pages together. Cut the pieces.

First, sew the gusset to the front panel with overlapping seam, front panel being on top of the gusset. Align the corner hole of the gusset with tvery last hole on the front panel and complete the seam to the other end.

Sew the gusset onto the back panel: it's a flesh-to-flesh side seam, align the corner hole of the gusset with the first hole right below the horizontal stitching line (the alignment is shown on the back panel part of the pattern, refer to it when stitching these together).

When the gusset is sewn together with front and back panel attach the flap and complete the top seam.


Make the strap of desired length according to your measurements. I include a demplate for 1" but you can make whatever you like, even a piece of rope would work.:)

Any questions or comments, e-mail me: lissius@gmail.com.

Join our Karlova Leatherwork Patterns Group on Facebook!
www.facebook.com/groups/karlovadesign




A-1

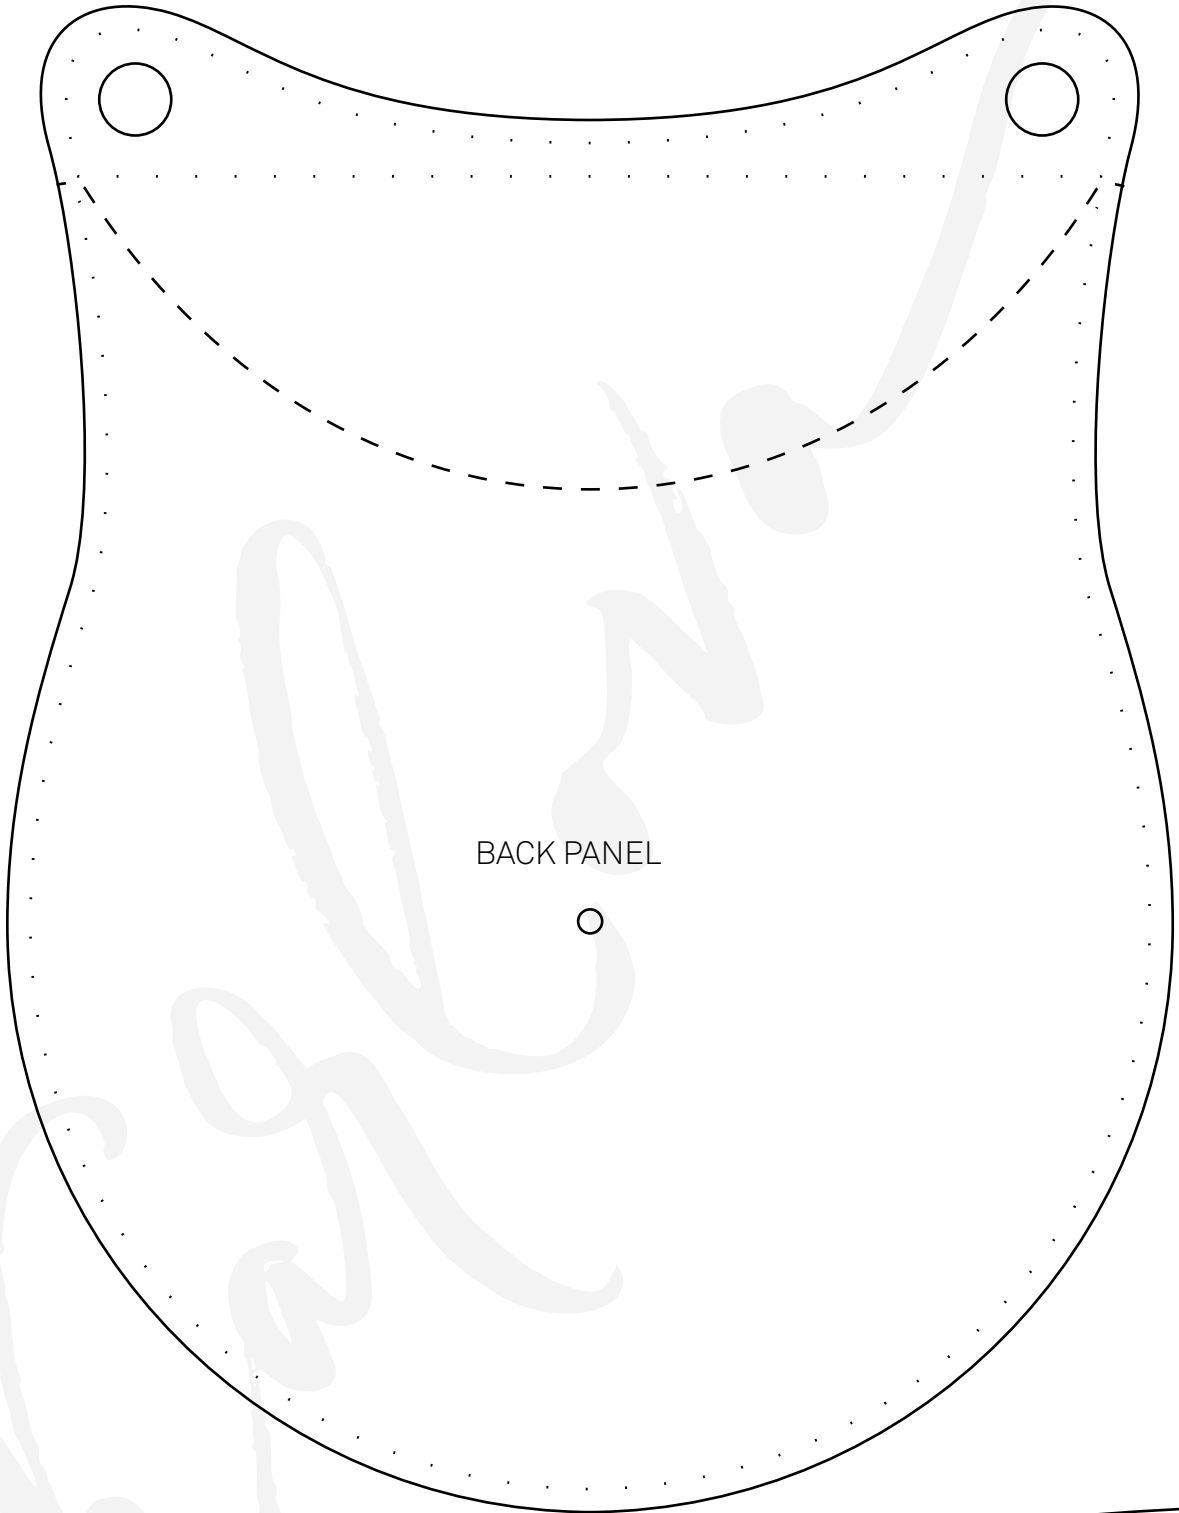


BACK PANEL




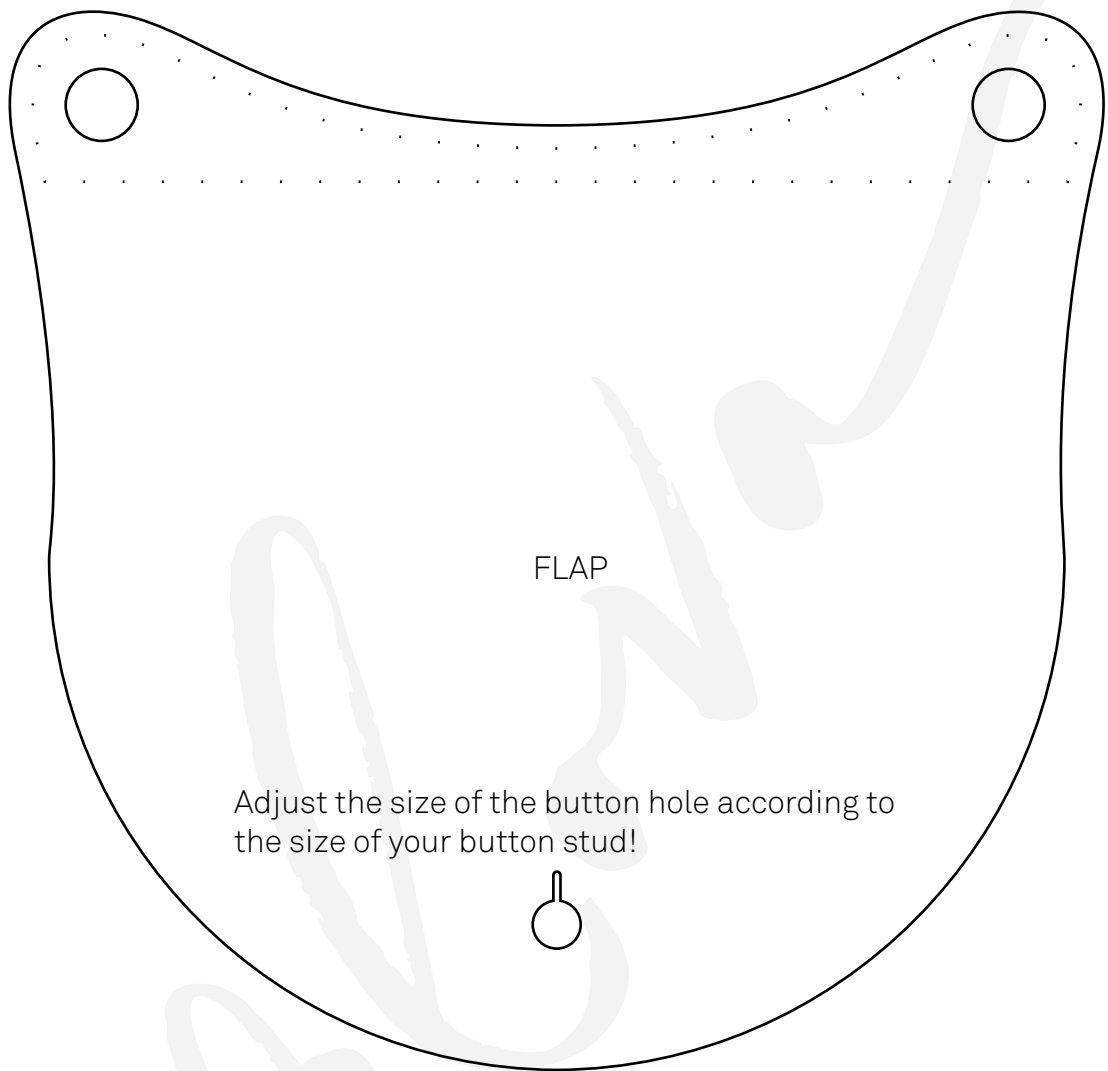


FLAP

Adjust the size of the button hole according to the size of your button stud!

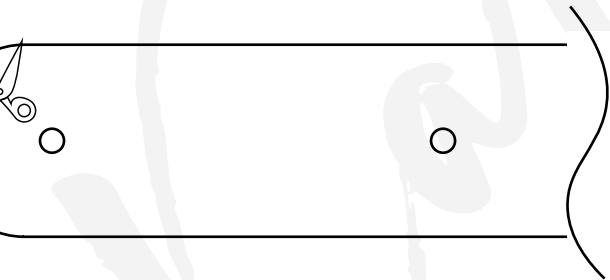

MEASURE THE DESIRED LENGTH. MINE IS 31"

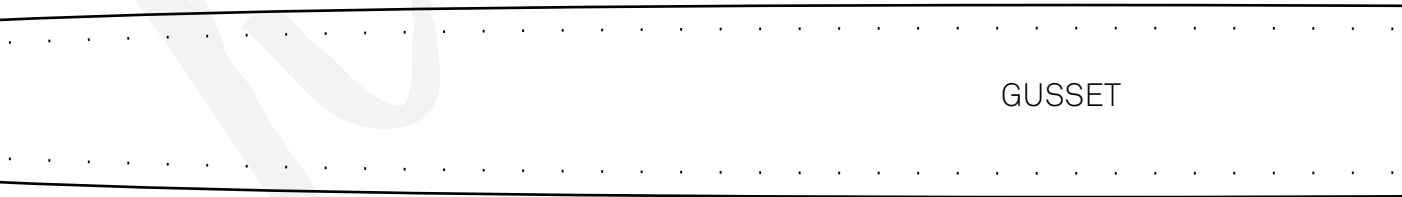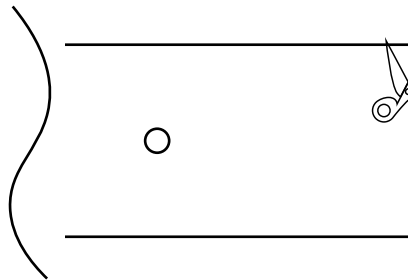


GUSSET

0cm 1cm 2cm 3cm 4cm 5cm

A-3

1in 2in 3in

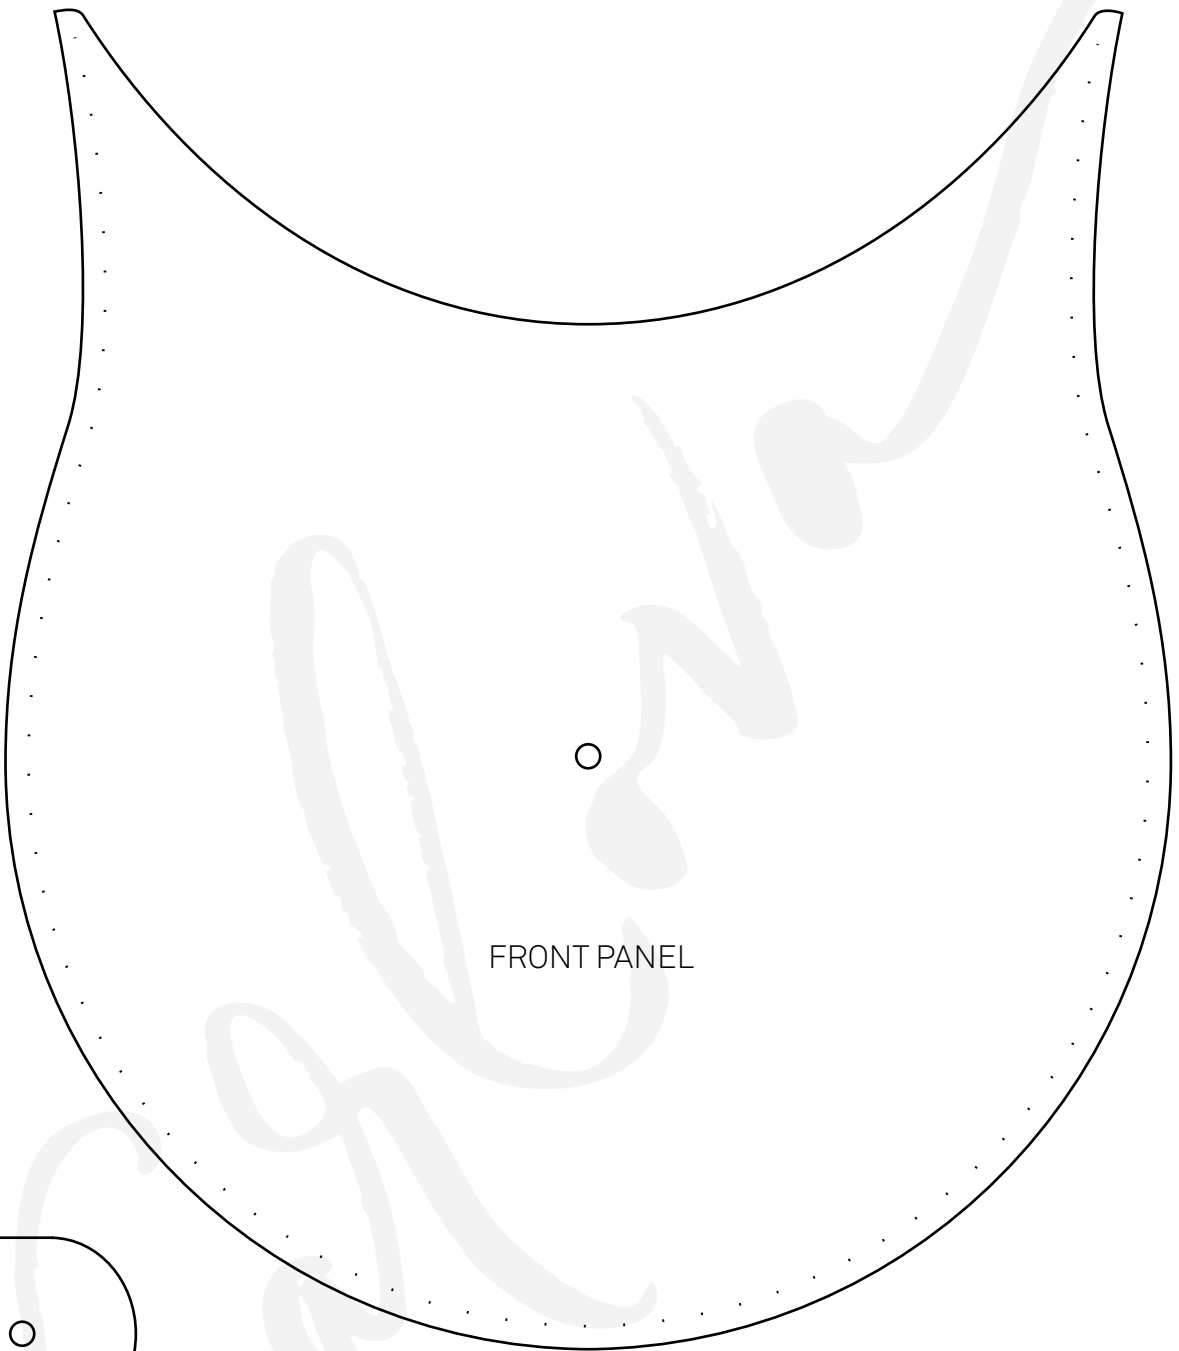

FRONT PANEL

